

# SERIES 620

## Enhanced Sound Level Meter

- Time history storage (1s to 30min intervals)
- Voice notes
- GPS
- Compact, rugged design
- Simple operation
- Single large measurement range
- Large memory
- High resolution colour display
- Real-time octave band analysis ('B' models)
- Simultaneous measurement of all workplace noise parameters
- Instrument menu in 9 languages
- Pre-defined and user configurations available
- Automatic calibration function
- Long battery life

### Overview

Ideally suited to a wide range of industrial noise measurement applications. The 620 series sound level meters use the latest digital technology to give high standards of performance, in a compact design, now with enhanced features:

- Time history storage
- Audio notes
- GPS

Using a high resolution colour TFT display, the 620 series is specifically designed to ensure taking noise measurements is quick and easy with voice notes to save taking manual notes during measurements.

Different models are available depending on your requirements for use in general workplace noise measurements, up to full industrial hygiene requirements where octave band analysis is required for the effective selection of hearing protection.



### Applications


- Occupational noise measurement
- Workplace noise according to ISO9612 and OSHA 29CFR 1910.95
- Selection of hearing protection
- Calculation of noise exposure
- Ensuring compliance with workplace noise legislation
- Machinery noise tests

## High Resolution Colour Display

The 620 series uses colours on the high-resolution display to aid the user in making measurements. Measurement screens are colour coded depending on the mode of operation, for example, during a measurement run, the header and footer of the display is green (shown right), whereas when a run is stopped they are red, similar to traffic lights for 'stop' and 'go'.

Measured parameters are displayed in different colours, and the bar graphs are illustrated with the same colours to give an easy understanding of the noise climate

- Unique colour coding of measurements
- Bright backlit display

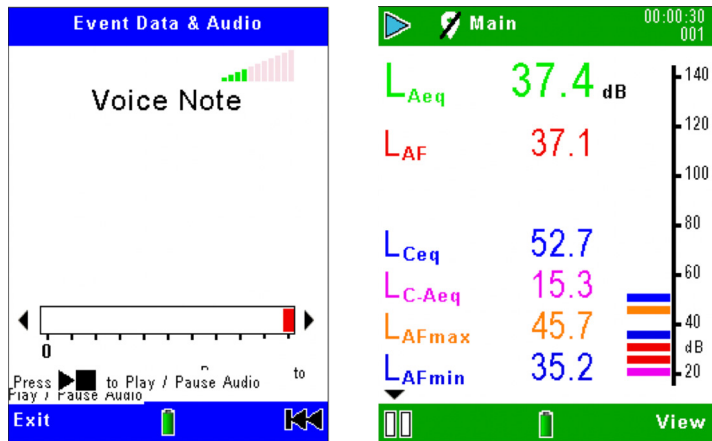

Audio notes to save time during measurements

Broadband measurement screen

## Simple Operation

The 620 series was designed with ease of use in mind. The menu structure is designed to pick up and use without the use of a manual. A simple icon structure is used with word prompts for each selection, available in nine languages.

The instrument has six selectable set-ups. Four pre-defined set-ups can be used to satisfy local workplace noise legislation.

Two user set-ups can be defined to display parameters and weightings as required. Regardless of the setup used, the 620 series measures and stores all parameters and weightings even if not selected. These can be viewed if necessary on the software.

Up to 999 measurements can be stored without the need to download. All runs are date and time stamped.

When connected to a PC via the USB connection, the 620 series acts like a memory card, so data files can be moved to a PC and easily reviewed without the need for proprietary software.

- Intuitive menu structure
- Multilingual user interface
- Predefined and user selectable set-ups

## Digital Technology

By using Digital Signal Processing (DSP) technology, the 620 series measures all the workplace noise parameters simultaneously with necessary time and frequency weightings, preventing incorrect setup of the instrument. The instrument has a single large measurement range of 20-140dB, eliminating the need to change measurement range and preventing errors.


On the CEL-620B model, octave analysis is performed in real-time, saving time compared to performing measurements sequentially.

Octave band results are shown in both bar-graph and tabular form with the dominant frequency highlighted. Time history of the broadband noise level is displayed in real-time and stored in selectable 1s to 30min intervals, so a user can see how the noise level varies with time.


- Voice Notes
- Time History Storage
- Large measurement range
- Simultaneous measurement
- Automatic calibration

Octave	LAEQ	LAFMAX
16Hz	0.0	1.9
31.5Hz	10.3	13.8
63Hz	20.9	24.9
125Hz	27.3	32.2
250Hz	35.7	39.1
500Hz	29.6	32.7
1KHz	29.0	36.3
2KHz	23.3	29.2
4KHz	20.5	25.9
8KHz	15.7	19.2
16KHz	7.4	8.6

Tabular octave results

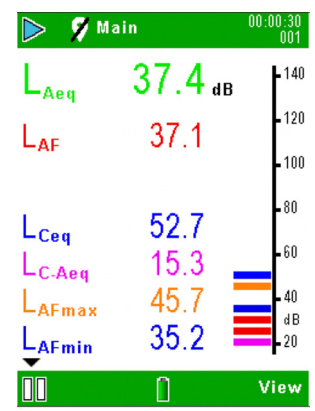

Time history display

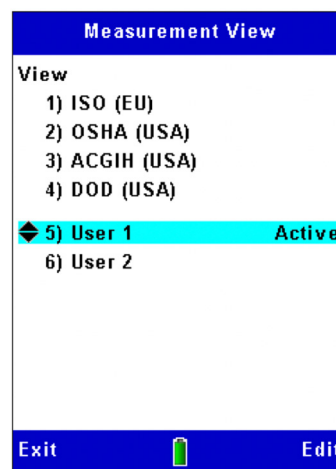

Set-up selection



Multi-lingual Interface

**Instrument Range & Calibration...**

All 620 models are integrating so measure average noise levels as well as peak levels for workplace noise legislation. CEL-620A model also simultaneously measures the  $L_C$  and  $L_A$  used within the HML method for the selection of hearing protection. In addition, the CEL-620B model performs real-time octave band analysis from 16Hz to 16kHz, values which are used in the octave band method for selection of hearing protection. If future requirements change, any instrument can be upgraded to a higher model without returning to Casella. Complete measurement kits are provided with an acoustic calibrator in a robust kit case complete with instruction manuals and calibration certificates.

- Range of instruments available
- Future proof upgrade ability
- Complete measurement kits
- All models available in Class 1 or Class 2



**CEL 120**  
Calibrator

When the CEL-120 calibrator is attached, the instrument automatically enters calibration mode

**Instrument Kits**

Complete kits are available with acoustic calibrator (CEL-120), kit case, windshield, instruction manuals and USB cable. For a complete instrument kit add /K1 to the part number e.g. CEL 620A2/K1.

A typical instrument kit is pictured. Kits come complete with Casella Insight Data Management Software, see Insight data sheet for more details.



**Order Information**

<b>CEL-620A2</b>	Integrating Digital Sound Level Meter (Class 2)
<b>CEL-620B2</b>	Integrating Octave Band Sound Level Meter (Class 2)
<b>CEL-620A1</b>	Precision Integrating Digital Sound Level Meter (Class 1)
<b>CEL-620B1</b>	Precision Integrating Octave Band Sound Level Meter (Class 1)
All instruments and calibrators are provided with calibration certificates.	

Other Accessories			
<b>CEL-6840</b>	Standard kit case	<b>CEL-6718</b>	Lightweight tripod
<b>206084D</b>	Executive kit case	<b>CEL-251</b>	Microphone Class 1
<b>CEL-6841</b>	Windshield	<b>CEL-252</b>	Microphone Class 2
<b>CEL-120/1</b>	Acoustic calibrator class 1	<b>PC18</b>	Universal power supply
<b>CEL-120/2</b>	Acoustic calibrator class 2	<b>CMC51</b>	USB download cable

Application Standards	
IEC 61672 - 2013 ANSI S1.4 - 1983 (R2006) ANSI S1.43 - 1997 (R2007)	Octave filters (CEL-620B model only) IEC 61260 Class 1 ANSI S1.11-2004
Technical	
<b>Total measurement range</b>	20 to 140dB RMS (single range), 143.0 dB Peak
<b>Frequency weightings RMS</b>	Simultaneous A, C & Linear (Z)
<b>Frequency weightings Peak</b>	Simultaneous A, C & Linear (Z)
<b>Time weightings</b>	Simultaneous Slow, Fast & Impulse
<b>Amplitude weightings</b>	Q3, Q4 and Q5 (Q4 & Q5 applicable to Lavg only)
<b>Thresholds</b>	70 to 90 (dB) in 1 dB steps (applicable to Lavg only)
<b>Noise floor</b>	<33dB(A) Class 2, <25dB(A) Class 1
<b>Memory</b>	999 runs, up to 24 hour length per run. 33 hours of audio notes. Up to 1 years storage with 1s time history selected
<b>Display</b>	320x240 pixel transmissive colour TFT
<b>Frequency bands</b>	11 octave bands 16Hz to 16kHz (CEL-620B model only) Selectable
<b>Time history</b>	Time history storage from 1s to 30min
<b>Audio notes</b>	Audio notes: 8,000 samples per second, 8bit, up to 4kHz
<b>Calibration information</b>	Stores pre and post run calibration date, time and level
<b>Output (P.C.)</b>	USB 2.0 'A' to 'Mini B'
<b>Batteries</b>	3 x AA Alkaline (supplied) or rechargeable
<b>External power</b>	9-14V DC at 250mA via 2.1mm connector
<b>Battery life</b>	11 hours with backlight on, 20 hours backlight off
<b>Tripod mount</b>	1/4" Whitworth socket
<b>Size mm (in)</b>	72 x 229 x 31mm (2.8 x 9.0 x 1.2")
<b>Weight gm (oz)</b>	295g (10.4oz)

Measured Parameters	
<b>CEL-620A</b>	LXY, LXYmax, LXYmin, LXeq, LXpeak, Lavg, LC-LA, LXleq, LTM3, LTM5, LAE
<b>CEL-620B</b>	LXY, LXYmax, LXYmin, LXeq, LXpeak, Lavg, LC-LA, LXleq, LTM3, LTM5, LAE
<b>Octaves</b>	LXY, LXeq, LXYmax

Where X is the frequency weighting A, C or Z and Y represents time weighting Fast (F), Slow (S) or Impulse (I). All weightings simultaneously measured where appropriate.

Environmental	
<b>In operation</b>	Relative humidity of 5% to 90% (non-condensing) Temperature 0 to 40°C (Class 2), -10 to 50°C (Class 1) Atmospheric pressure of 65 to 108kPa
<b>In storage</b>	0 to 90%RH in the absence of condensation, Temperature -20 to 60°C, Atmospheric pressure of 65 to 108kPa